


A124
A125

Description

An auxiliary inlet connection, used to supplement the fire protection water supply. Bodies with built-in drop clappers that provide unobstructed waterway; four-way square body.

Four way squared body auxiliary inlet connection, used to supplement the fire protection water supply. Bodies with built-in drop clappers that provide unobstructed waterway

Versions and product codes

Series	Size	Type	Finishing
A124 BACK OUTLET BODY	6" x 3"	NPT inlets (F) x NPT outlet (F)	Rough bronze
	8" x 3"		
A125 ANGLE OUTLET BODY	6" x 3"	NPT inlets (F) x NPT outlet (F)	Casted bronze
	8" x 3"		



Note.
The 8" versions use the 6" bodies with an adapter 6" x 8".

Technical data


- Rated pressure: 300 PSI (20,6 bar)

Materials


- Body: casted Bronze CB491K UNI EN1982-2000
- Tensile strength of the material in the shape of bar: min. 220 MPa
- Stress for permanent distortion R(0.2): min. 110 MPa
- Elongation: min. 6 %

Dimensions

A124 – BACK OUTLET BODY, NPT (F x F)

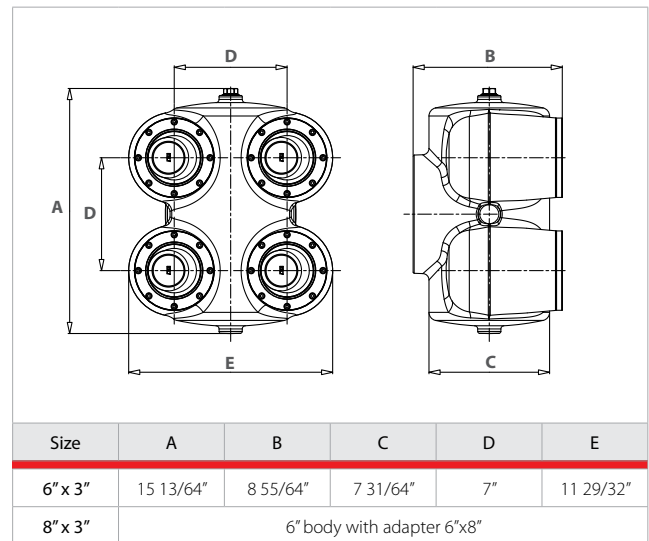

A125 - ANGLE OUTLET BODY, NPT (F x F)

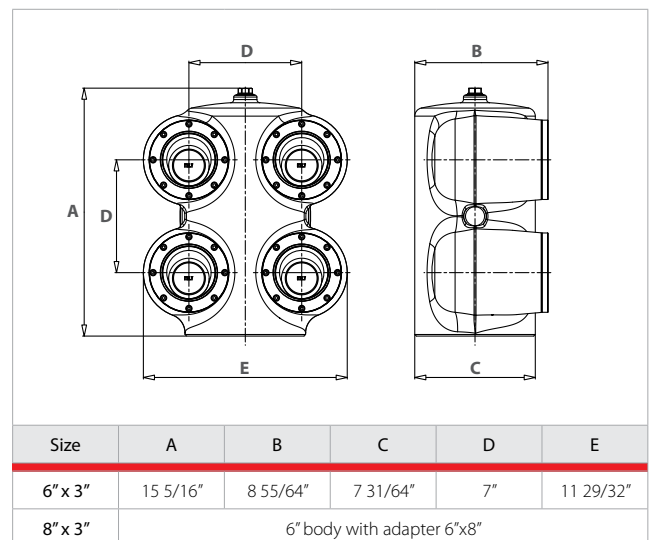

Product specifications

A124 – BACK OUTLET BODY 6"

Flush Fire Department inlet connections clapper body type (body includes clappers), back outlet body, NPT (F x F), with main feature as following:

- Casted bronze
- 6" female NPT outlet
- 3" female NPT inlets
- Rated pressure 300 psi

A124 – BACK OUTLET BODY 8"

Flush Fire Department inlet connections clapper body type (body includes clappers), back outlet body, NPT (F x F), with main feature as following:

- Casted bronze
- 8" female NPT outlet
- 3" female NPT inlets
- Rated pressure 300 psi

**A125 - ANGLE OUTLET BODY 6"**


Flush Fire Department inlet connections clapper body type (body includes clappers), angle outlet body, NPT (F x F), with main feature as following:

- Casted bronze
- 6" female NPT outlet
- 3" female NPT inlets
- Rated pressure 300 psi

A125 - ANGLE OUTLET BODY 8"

Flush Fire Department inlet connections clapper body type (body includes clappers), angle outlet body, NPT (F x F), with main feature as following:

- Casted bronze
- 8" female NPT outlet
- 3" female NPT inlets
- Rated pressure 300 psi

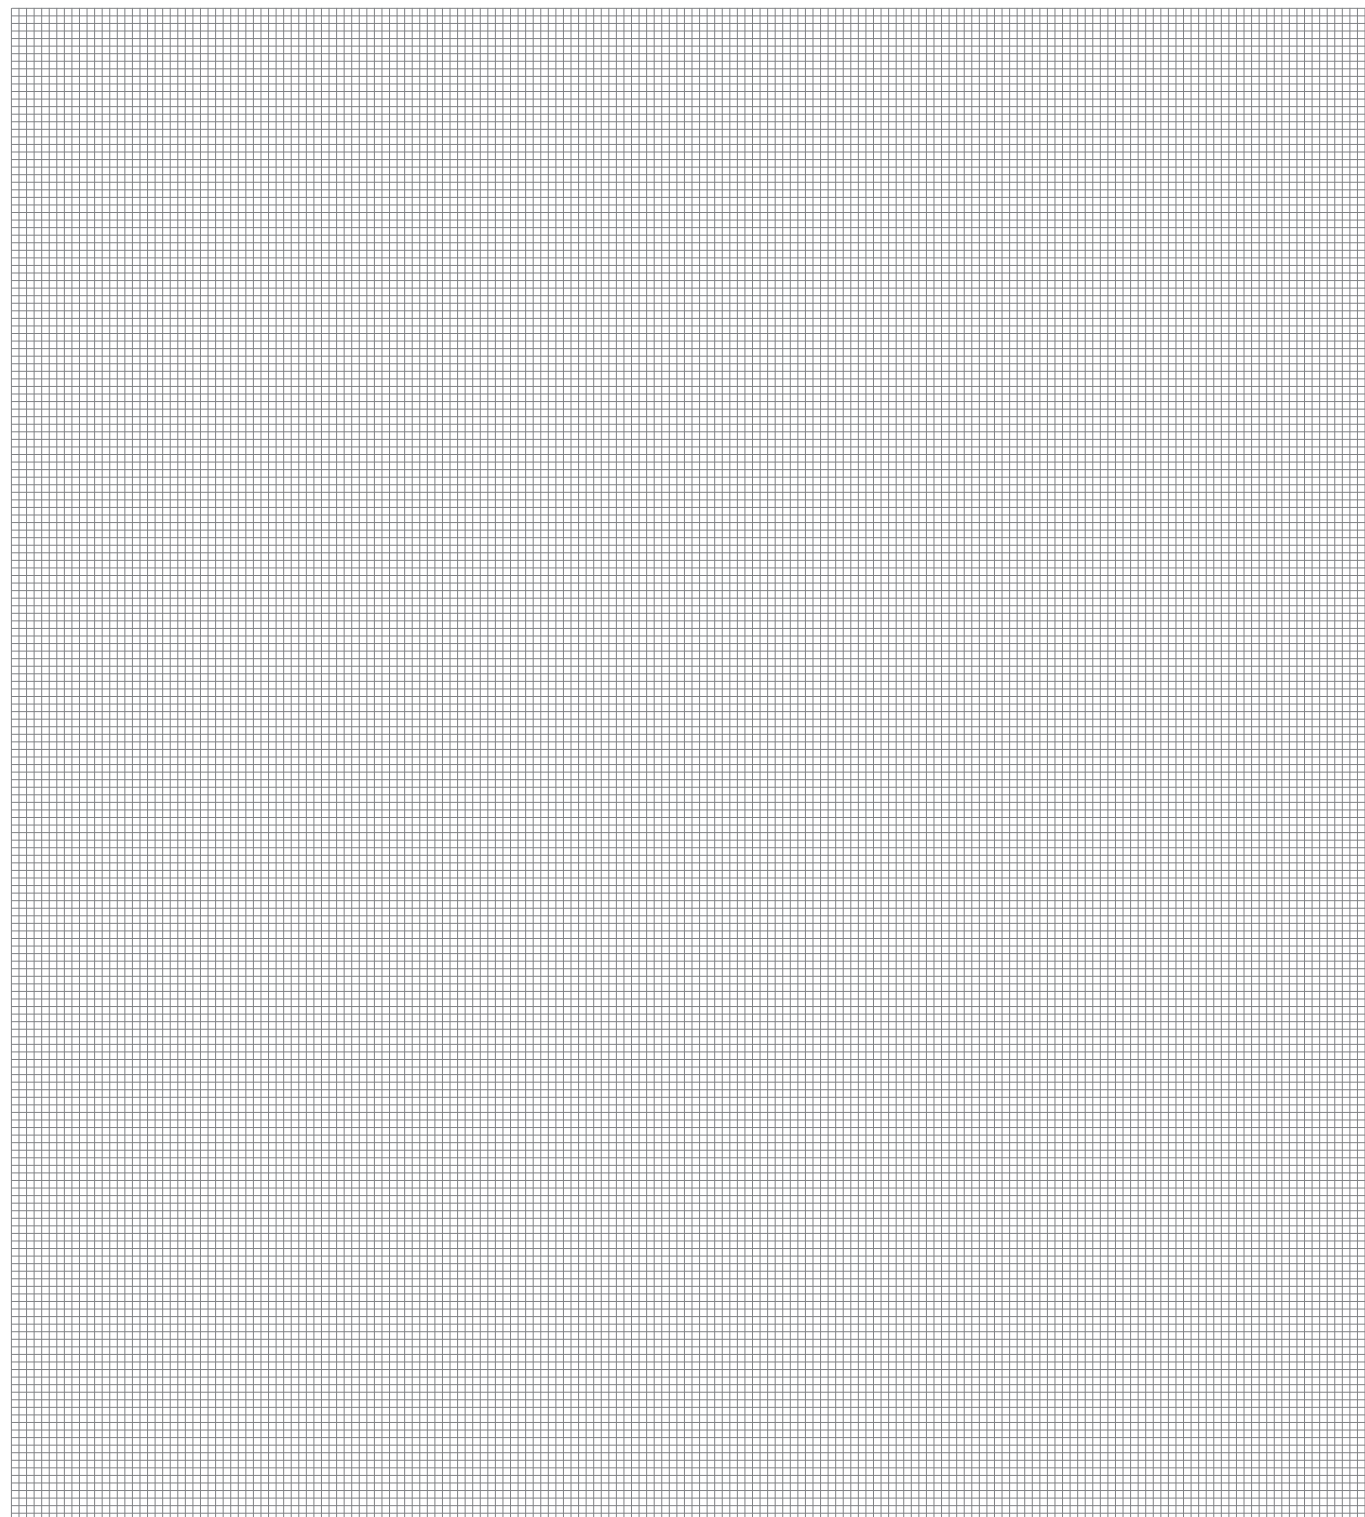**Additional information**

For additional information please check the website www.giacomini.com or contact the technical service: ☎ +39 0322 923372 ☎ +39 0322 923255 ✉ consulenza.prodotti@giacomini.com
 This pamphlet is merely for information purposes. Giacomini S.p.A. retains the right to make modifications for technical or commercial reasons, without prior notice, to the items described in this pamphlet. The information described in this technical pamphlet does not exempt the user from following carefully the existing regulations and norms on good workmanship.
 Giacomini S.p.A. Via per Alzo, 39 - 28017 San Maurizio d'Opaglio (NO) Italy